



EXTREMELY FLEXIBLE

HIGH-CAPACITY
POWER GUILLOTINE
MultiCut F



The allround
cutting machine.

HIGH-CAPACITY POWER GUILLOTINE MultiCut F

The flexible Stack Cutter for different materials.



WATCH OUR
PRODUCT
VIDEO!



HIGH-CAPACITY POWER GUILLOTINE MULTICUT F – FOR QUICK AND EFFECTIVE CROSSCUTTING OF MATERIAL PACKAGES.

Josting has the leading technology for large size cutting. The High-Capacity Power Guillotine MultiCut F cuts paper, plastic film, cardboard and other materials. Cutting forces are reliably absorbed by the rugged steel and cast iron construction.

Material stacks are cut quickly and cleanly. The High-Capacity Power Guillotine MultiCut F is user-friendly and reliable, and it enables a high level of productivity.

The positioning controller for the parallel fence features a width gauge, a numeric key-pad, a cut counter and pushbuttons for selecting the various operating modes. Dimensions are adopted automatically when the start button is pressed.

Ergonomic: Large air cushion tables with stainless steel surfaces facilitate movement of heavy material.

THE MULTICUT F CUTS:

- Veneer
- PVC
- All-plastic
- Polystyrol
- Acryl
- Honeycomb boards
- Papers
- Plastic films
- Cardboard
- ... and much more

WHAT DO YOU LIKE TO CUT?

Feel free to send us samples of your materials for test cuts – we will be happy to assist you in your tasks!

IMPORTANT FEATURES AT A GLANCE




EXACT LASER GUIDE LIGHT

The green LED guide light clearly marks the cutting position.



SIMPLE OPERATION

Parallel fence with high-speed motor-driven positioning and a digital width gauge. The positioning control system can store up to 99 dimensions.

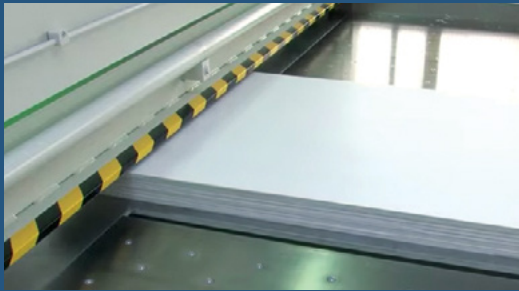

EXACT CUTS

Long angular fences on the right and left for exact cuts. Hydraulic pressure bar with 2 pressure settings for holding the material stack securely on the machine table.



POWERFUL DRAWING ACTION

Pre-finishing cut ensure neat and rectangular edges when cutting thick materials.



PRACTICAL AIR CUSHION TABLES

Air-cushion tables for easy movement of heavy stacks. Intermittent operation of the quiet drives.



MAXIMUM SAFETY

Occupational safety regulations met by a light barrier, safety-orientated electric control system and mesh guards.

NEW!

Optional for all MultiCut Cutting Machines:
SIEMENS S7 SPS Controller

HIGH-CAPACITY POWER GUILLOTINE

MultiCut F

Technical data all types

Insertion height	80 mm
Pressure bar	2 Hydraulic cylinders, 2 Pressure stages
Cutter bar	Brake motor, gearing, crank drive
Parallel fence	Three-phase a.c. motor, positioning drive
Connected load	9 kW

MultiCut F	2300	2800	3200	3600	4200	4500
Cutting length	2300 mm	2800 mm	3200 mm	3600 mm	4200 mm	4500 mm
Parallel fence ⁽¹⁾	200-2200 mm	200-2200 mm	200-3300 mm	200-3300 mm	200-3300 mm	200-4200 mm
Net weight	3500 kg	4000 kg	4400 kg	4900 kg	5500 kg	5800 kg

(1) Upon request different ranges possible. Specifications subject to alterations.